


NITE BRITES

JOB NAME _____

TYPE _____

BIS-RLM SERIES - ZOE


50-175 watt Metal Halide
 35-150 watt High Pressure Sodium
 26-60 watt Compact Fluorescent
 18 watt LED



The RLM Series offers unique designs and old standards to enhance the aesthetic appeal of restaurants, retail stores, businesses, and other areas where decorative reflector units are desired.

ORDERING MATRIX

SAMPLE CATALOG NUMBER: BIS42CCXX-ZOE-GER-FR

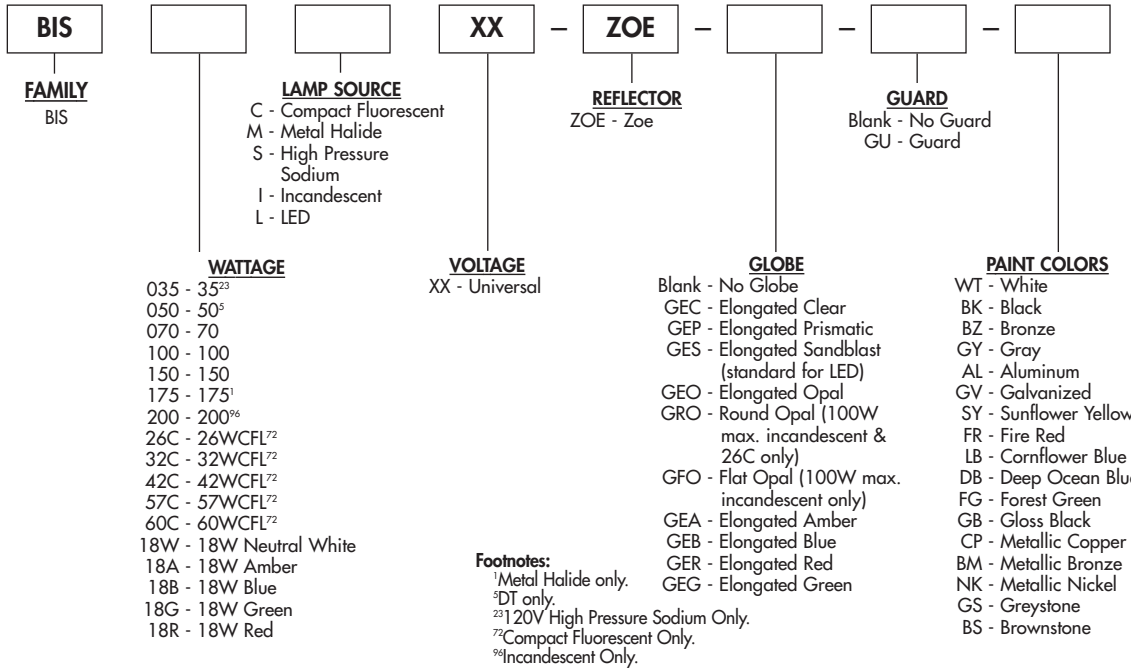


Footnotes:
¹Metal Halide only.
⁵DT only.
²³120V High Pressure Sodium Only.
⁷²Compact Fluorescent Only.
⁹⁶Incandescent Only.

ACCESSORIES (order separately)
 For additional descriptions of accessories, refer to sheet numbers DC-47900 and DC-47910.

General Notes:
 All options are factory installed.
 Medium base lamp only.
 GX24q lamp base for 26-57W compact fluorescent.
 2G8 lamp base for 60W compact fluorescent.
 All accessories are field installed.

Warning: Refer to and follow the lamp manufacturer's warnings and instructions.


DIMENSIONS

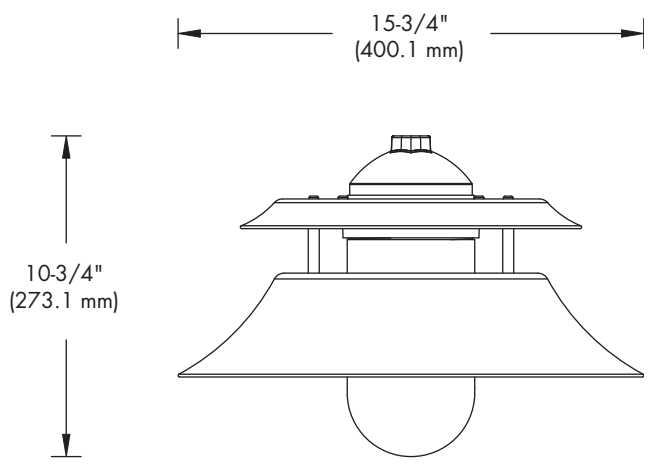


Day-Brite® Lighting

BIS - RLM SERIES - ZOE DC-47030.1


PHOTOMETRICS




BIS100IXX-ZOE-GEP
 TEST NUMBER: 26242
 LAMP: 100W A19
 LUMENS: 1,680
 MOUNTING HEIGHT: 12 FEET







BIS175MXX-ZOE-GEP
 TEST NUMBER: 26241
 LAMP: 175W MH, COATED
 LUMENS: 15,000
 MOUNTING HEIGHT: 12 FEET



BIS42CCXX-ZOE-GEP
 TEST NUMBER: 26290
 LAMP: 42W CFL
 LUMENS: 3,200
 MOUNTING HEIGHT: 12 FEET



BIS18WLXX-ELE-GES
 TEST NUMBER: 27584
 LAMP: 18W LED NEUTRAL WHITE
 LUMENS: 700
 MOUNTING HEIGHT: 12 FEET

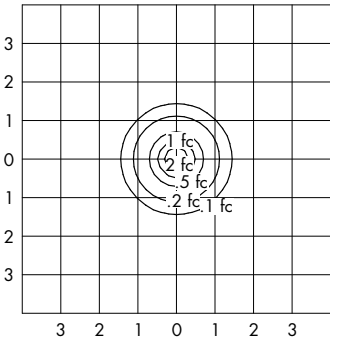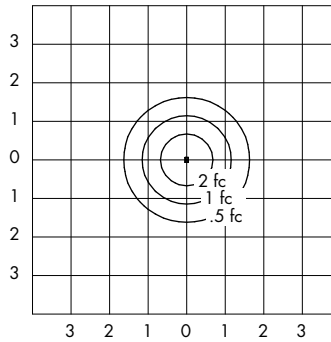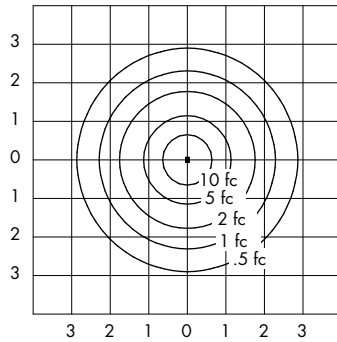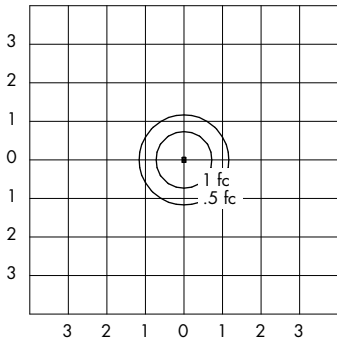

UNITS SHOWN IN TERMS OF MOUNTING HEIGHT
 INITIAL FOOTCANDLES SHOWN

PRODUCT FEATURES

- UL 1598 Listed for wet location and 25°C ambient for all lamp wattages listed.
- 1. 1/2" NPT threaded hub for easy, positive mounting.
- 2. Die cast aluminum pendant mount assembly with polyester powder finish.
- 3. Spun aluminum reflector assembly with polyester powder finish.
- 4. Optional heat and shock resistant glass optical.
- 5. Optional die cast aluminum guard with polyester powder finish. (Not shown)

