


# LBQ LUMINAIRE

The LBQ Ice-Etronic Low Bay Luminaire is designed for use in gymnasiums, warehouses, educational, retail and commercial applications, where the 100,000 hour lamp life will reduce high maintenance costs.

## DIMENSIONS

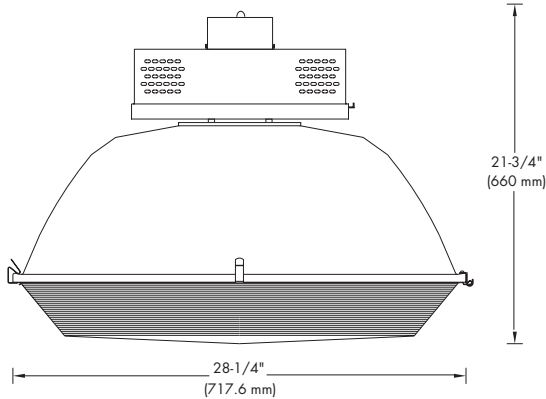

### ICETRON® Features

- Long 100,000 hour life.
- Instant on/instant restrike.
- Universal voltage ballast.
- Consistent color - 80 CRI.
- High output electronic system.
- Low temperature starting as low as -40°C.
- Amalgam technology for wide operating temperature range.
- 3500K & 4100K color temperatures (white light)
- Ballast remote mounting possible.

### Features

- Heavy wall aluminum housing with white polyester powder finish for excellent corrosion and impact resistance.
- Spun aluminum reflector with a highly reflective (90-92%) white polyester powder finish inside and out.
- One piece, injection molded acrylic lens hinged and latched to the reflector for ease of installation and maintenance.
- UL 1598 listed for use in 40°C ambient and damp location applications.
- Electronic Ballast.
- Lamp supplied in the unit in 3500°K, 4100°K or 5000°K color temperature.
- -40°C starting.
- 5 year warranty.
- CSA/uCL certified.
- 100,000 hours lamp life.
- Luminaire is shipped completely assembled with lamps installed.
- Inductively coupled electromodeless lamp technology.



**SAMPLE CATALOG NUMBER\*: LBQ2150E-U-41-LR28CF**

<b>LBQ</b>		<b>E - U</b>	<b>- LR28CF</b>
<u>BALLAST ASSEMBLY</u> LBQ		<u>VOLTAGE</u> U - Universal 120-277	<u>OPTICAL ASSEMBLY</u> LR28CF - Acrylic Lens 28"
	<u>WATTAGE</u> 70 100 150		
		<u>LAMP SOURCE</u> E - ICETRON®	<u>OPTIONS</u> 35 - 3500°K 41 - 4100°K 50 - 5000°K
	<u>LAMP QUANTITY</u> 1 - (40°C Ambient) 2 - (40°C Ambient) 3 - (35°C Ambient)		

### ACCESSORIES:

- CH** - Cover Half for Power Hook (use with PB)
- PB** - Power Box for Power Hook (use with CH)
- HP12** - Hook-Cord-Plug Assembly 120V
- HP25** - Hook-Cord-Plug Assembly 208-240V
- HP27** - Hook-Cord-Plug Assembly 277V
- HMR** - Suspension Hook Male
- LMR** - Suspension Loop Male
- WGLR28** - Wire Guard

### General Notes:

All options are factory installed.  
All accessories are field installed.  
NOTE: 100W lamp operated on 150w driver.