


# WLL WALL LIGHT/LARGE

The Large Wall Light is ideal for general and security lighting in areas requiring high light levels at higher mounting heights. Use for exterior applications such as retail buildings, residential complexes, educational facilities, hotels, tunnels, underpasses, warehouses and industrial applications.

## DIMENSIONS

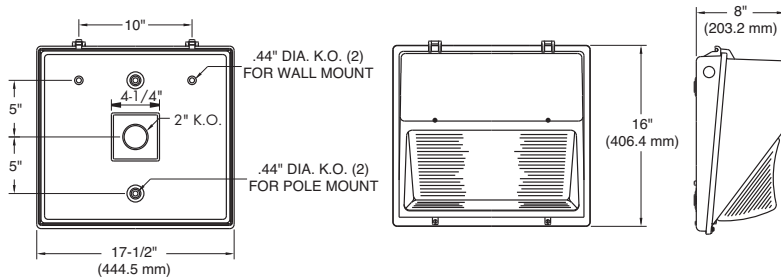

### Accessories (order separately)

- **DFD** - Double Fuse Holder only
- **FSF** - Single Fuse Holder only
- **VCWLL** - Full Cutoff Shield
- **GSWLL** - Glare Shield
- **VSWLL** - Vandal Shield
- **WGWLL** - Wire Guard
- **PC-MT** - Photo Control Twist Lock multi-volt (must have PCR option)
- **PC-48** - Photo Control Twist Lock 480 volt (must have PCR option)
- **PCR-SC** - PCR Shorting Cap
- **WLS-PEC12** - Photo Control 120 volt
- **WLS-PEC27** - Photo Control 208-277 volt
- **WLL-PMK** - Pole Mounting Kit
- **TP** - Tamper Proof Screws

(For additional descriptions of Wall Light accessories refer to pages 818-819.)

### SAMPLE CATALOG NUMBER: WLL400MMT-Q

WLL		-	
FAMILY	LAMP SOURCE	OPTIONS	
<b>WLL</b>	<b>M</b> - Metal Halide <b>S</b> - High Pressure Sodium <b>P</b> - Pulse Start Metal Halide (Ballast option must also be specified) <b>N</b> - Induction	<b>CUL</b> - UL Listed to meet CSA standards <b>HR</b> - Hot Restrike <sup>34</sup> <b>LP</b> - Lamp with fixture <b>PCR</b> - Photo Control Receptacle <sup>13</sup> <b>PE</b> - Photo Control (not available in 480V) <b>PSC</b> - Pulse Start CWA <b>Q</b> - Quartz Stand-by <sup>37</sup> <b>QEM</b> - Quartz Emergency <sup>40</sup> <b>QTD</b> - Quartz Time Delay <sup>39</sup> <b>WDF</b> - Wired Double Fuse <sup>45</sup> <b>WSF</b> - Wired Single Fuse <sup>46</sup>	
	<b>WATTAGE</b>	<b>VOLTAGE</b>	
	<b>150</b> - 150 <b>165</b> - 165 <sup>91, 92</sup> <b>175</b> - 175 <sup>1, 33</sup> <b>200</b> - 200 <sup>31</sup> <b>250</b> - 250 <b>320</b> - 320 <sup>30</sup> <b>350</b> - 350 <sup>30</sup> <b>400</b> - 400	<b>48</b> - 480 <b>MT</b> - 120/208/ 240/277 <b>TT</b> - 120/277/ 347 <b>5T</b> - 120/208/240/277/480 <sup>98</sup>	

### Footnotes:

- <sup>1</sup>Metal Halide only.
- <sup>13</sup>Order Twist Lock Photo Control separately.
- <sup>30</sup>Pulse Start Metal Halide only.
- <sup>31</sup>Not available in standard Metal Halide.
- <sup>33</sup>Not available in Pulse Start Metal Halide.
- <sup>34</sup>Available in 150 High Pressure Sodium and below.
- <sup>39</sup>Pre-wired by factory.
- <sup>40</sup>Requires 120 volt secondary power supply.
- <sup>45</sup>Use with 208, 240 and 480 volt.
- <sup>46</sup>Use with 120, 277 and 347 volt.
- <sup>91</sup>Induction lamp only.
- <sup>92</sup>120 through 277 volt only. Specify voltage.
- <sup>98</sup>Available in 250, 400, or 1000 watt.

### General Notes:

- Mogul base lamp only.
- All options are factory installed.
- All accessories are field installed.
- Data subject to change without notice.

**Warning:** Refer to and follow the lamp manufacturer's warnings and instructions.

For ballast electrical data, see pages 747-750.

### Features

- Heavy duty two piece die cast aluminum housing is top hinged for ease of maintenance. Two captive stainless steel door fasteners.
- 3/4" threaded conduit top entry with closed up plug, 3/4" knockouts on each side for surface conduit entry.
- Clear prismatic borosilicate glass refractor is thermal/shock resistant.
- Computer designed and precision formed specular aluminum reflector.
- All electrical components in front housing, with quick disconnect for ease of installation/service. Lightweight back plate is easily attached to wall, quick disconnect eases front housing installation.
- Gaskets are long lasting silicone rubber.
- Dark bronze polyester powder finish for excellent impact, corrosion and UV resistance.
- UL 1598 Listed for wet locations at 25°C and feed-through wiring.



WLL

WALL LIGHT/LARGE

**NITE**  
**Brites**  
TM